



Sanitary accessories / Flexible coupling

Codes : FLEXFM – FLEXHM – FLEXJM – FLEXF – FLEXH – FLEXJ




FLEXFM

| Codes | ØD | Dimensions (mm) | | |
|--------|----|-----------------|-----------|---------|
| | | L | L1 female | L2 male |
| FLEXFM | 32 | 212 | 23 | 22 |
| FLEXHM | 40 | 231 | 27 | 26 |
| FLEXJM | 50 | 248 | 30 | 31,5 |
| FLEXF | 32 | 208 | 23 | |
| FLEXH | 40 | 226 | 27,5 | |
| FLEXJ | 50 | 245 | 32 | |



FLEXF

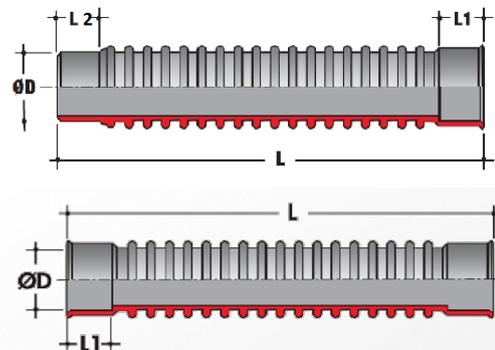

■ FUNCTION :

- Specifically designed for renovation, they allow realisation of multiple connections in case of repair and in difficult access. They are exclusively aimed at draining domestic waste water and must not be embedded.

■ DESCRIPTION :

- Injected in PVC with bi-injection technology, which gives them the qualities of strength, uniformity (monobloc product) and especially hydraulic performance with a smooth inner wall which prevents retention.

■ CHARACTERISTICS :

- Male-female and female-female flexible coupling is composed of :

- * A flexible body
- * Two rigid ends

■ INSTALLATION :

- Male – female coupling : simple PVC / PVC bonding of the male pipe into the female socket and the socket male sleeve in the socket female connector or socketed pipe.

- Female – female coupling : Simple PVC / PVC bonding of male pipe into the female sockets of the coupling.

Warning :

- maximum angle 45 °
- do not put glue on the flexible part

■ QUALITY - ENVIRONMENT :



MARCH : 2016