



DESCRIPTION

G61


Vanne à sphère passage intégral.
Norme UNI - CIG - DIN - DVGW.
Femelle/Femelle FxF.
Poignée acier jaune.



ROB-GAZ

Norme XP E-29-141 (08-99) et NF EN 331 (11-98)
Certificat admission n° ROB 004-R1

DIMENSIONS

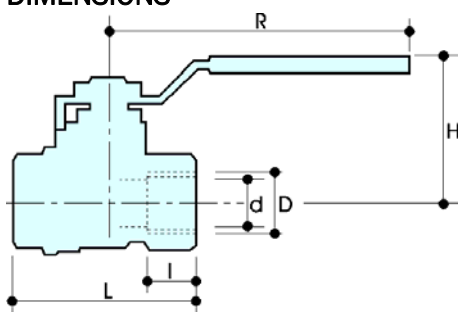

D	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
d	15	20	25	32	40	50
H	39	49	61	66	82	89
I	17	18	21.5	23.5	23.5	28
L	62	69	84	96	106	127
R	75	95	120	120	150	150
Acc.	1	2	3	3	4	4
PN	8	8	8	8	8	8
g	230	370	660	970	1360	2160

Tous les filetages sont conformes à la norme ISO 7/1 ou ISO 228

COMPOSANTS




Corps	CuZn40Pb2 Cw617N (DIN 50930 part.6)
Sphère	CuZn40Pb2 Cw617N (DIN 50930 part.6) Diamantée et chromée.
Tige	CuZn39Pb3 Cw614N (DIN 50930 part.6)
Presse-étoupe	CuZn39Pb3 Cw614N (DIN 50930 part.6) Réglable.
Joints	PTFE
O-rings	2 x Viton® PTFE
Poignée	Acier revêtu de PVC

APPROBATIONS



DIAGRAMME DES PERTES DE CHARGE

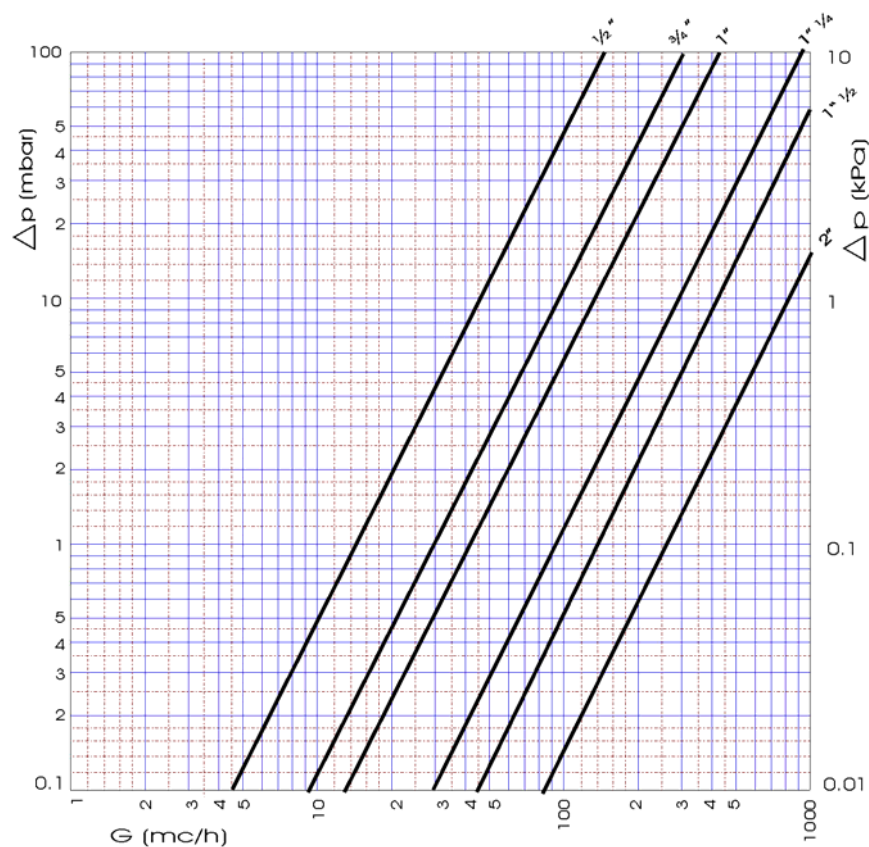

LIMITES DE PRESSION / TEMPÉRATURE RECOMMANDÉES

Pression max. 8 bar
 Température min. -20°C
 Température max. 60°C