


BRIDE A COLLERETTE

PN 10 - 16

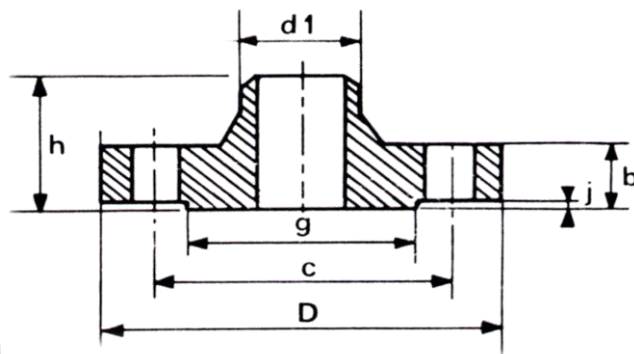

REF. 11400 PN 10 - REF. 11410 PN 16
REF. 11401 GALVANISEE

Matière : Acier P 245 GH
Norme EN 1092-1

Diamètre	d1	D	b	h	g	j	c	BOULONS			Poids kg
								Nbre	φ	Trou	
50	60.3	165	18	45	102	2	125	4	M16	18	2.53
65	76.1	185	18	45	122	2	145	8	M16	18	3.06
80	88.9	200	20	50	138	2	160	8	M16	18	3.70
100	108	220	20	52	158	2	180	8	M16	18	4.62
100	114.3	220	20	52	158	2	180	8	M16	18	4.62
125	133	250	22	55	188	2	210	8	M16	18	6.30
125	139.7	250	22	55	188	2	210	8	M16	18	6.30
150	159	285	22	55	212	2	240	8	M20	22	7.75
150	168.3	285	22	55	212	2	240	8	M20	22	7.75
175	193.7	315	24	60	242	2	270	8	M20	22	9.65
200 PN 10	219.1	340	24	62	268	2	295	8	M20	22	11.30
200 PN 16	219.1	340	24	62	268	2	295	12	M20	22	11,30
250 PN 10	273	395	26	68	320	2	350	12	M20	22	14.70
250 PN 16	273	405	26	70	320	2	355	12	M24	26	15.70
300 PN 10	323.9	445	26	68	378	2	400	12	M20	22	17.40
300 PN 16	323.9	460	28	78	378	2	410	12	M24	26	22.00
350 PN 10	355.6	505	26	68	438	2	460	16	M20	22	24.00
350 PN 16	355.6	520	30	82	438	2	470	16	M24	26	30.00
400 PN 10	406.4	565	26	72	490	2	515	16	M24	26	29.00
400 PN 16	406.4	580	32	85	490	2	525	16	M27	30	38.00

NOTA : La norme impose d'utiliser le PN 40 pour les DN 15 à 40